



WALTHAMBURY®



STC8600

SACK TOP CONTROL

STC8600

SACK TOP CONTROL

The Walthambury STC8600 incorporates a pneumatic bag clamp to hold the bag during the filling process. Once the bag is filled it is lowered onto the conveyor where guide plates ensure that the top of the bag is held, formed and fully supported during the cycle from the bag clamp through the automatic infeed device. It is then delivered to the stitcher or heat sealer BEFORE being released.

- Ensures rapid, stable, upright transfer from the filling station to the sewing head or heat sealer for uniform, parallel, precision sealing every time.
- Full pneumatic operation with PLC control for reliability.
- Either L-R or R-L system directions available.
- Can accommodate Newlong, Fischbein, Union Special and Reed Medway sewing heads or a heatsealer. All on either fixed height or adjustable mountings. Adjustable board formers for different bag specifications.
- Operates with Intralox flat track conveyor. Typical throughput of up to 600 bags per hour.
- Designed for use with a MASP or MASP Lite sack placer, alternatively sacks can be manually placed.


Models

- WJM8600- Fixed with Newlong NP7 Sewing Head
- WJM8601- Adjustable with Newlong NP7 Sewing Head
- WJM8602- Fixed with Newlong DS-9 Sewing Head
- WJM8603- Adjustable with Newlong DS-9 Sewing Head
- WJM8604- Fixed with Fischbein Sewing Head
- WJM8605- Adjustable with Fischbein Sewing Head
- WJM8606- Fixed with Reed Medway Sewing Head
- WJM8607- Adjustable with Reed Medway Sewing Head
- WJM8608- Fixed with Union Special Sewing Head
- WJM8609- Adjustable with Union Special Sewing Head
- WJM8610- Fixed with Heat Sealer
- WJM8611- Adjustable with Heat Sealer

After Sales Service

Fast on site service by factory trained engineers coupled with extensive stocks of competitively priced spare parts guarantees maximum productivity and protects the customer's investment.

Walthambury® is a registered trademark of W. J. Morray Engineering.

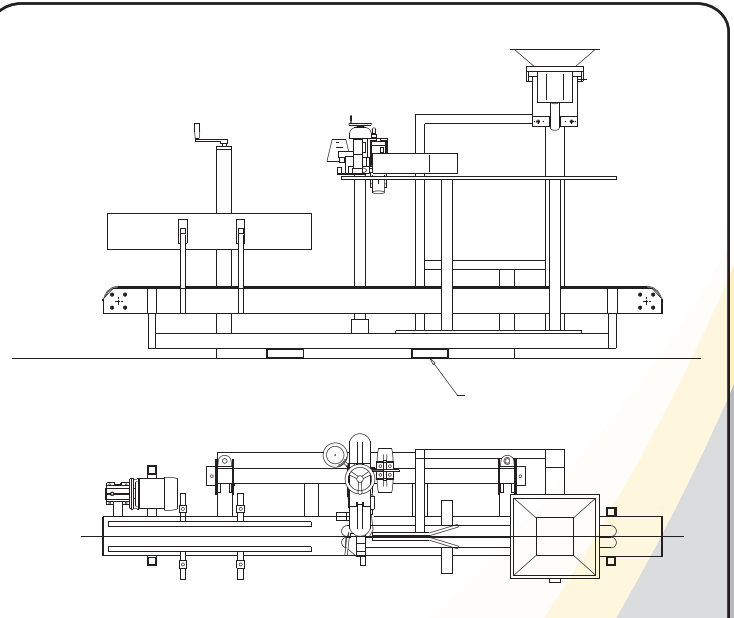

TECHNICAL SPECIFICATIONS

Throughput

Typically around 600 bags per hour.

Air Requirements


A cool dry air supply, 5.5bar (5cfm/142 ltr/min @ 80psi)

Electrical Requirement

3 Phase 415/380 or 240/220v

1 Phase 240/220v

50hz supply

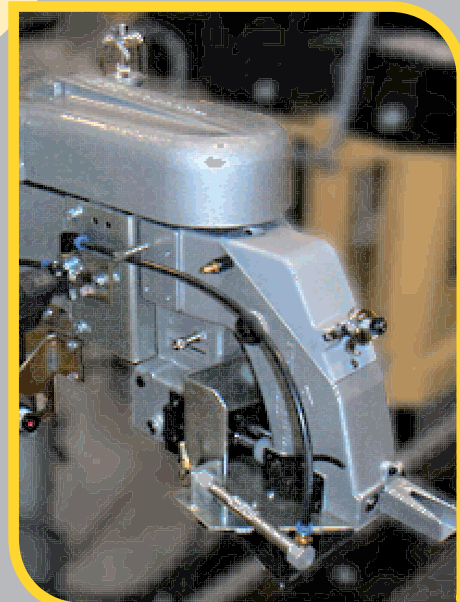

Newlong NP7 Sewing head



Walthambury

New Walthambury House,
Anglia Way, Braintree,
Essex, CM7 3RG, UK.
Tel: +44 (0)1376 322722
Fax: +44 (0)1376 323277
E-Mail: sales@morray.com
www.walthambury.com