




THE SACK FILLING &
ROBOT PALLETISING
COMPANY
LIMITED

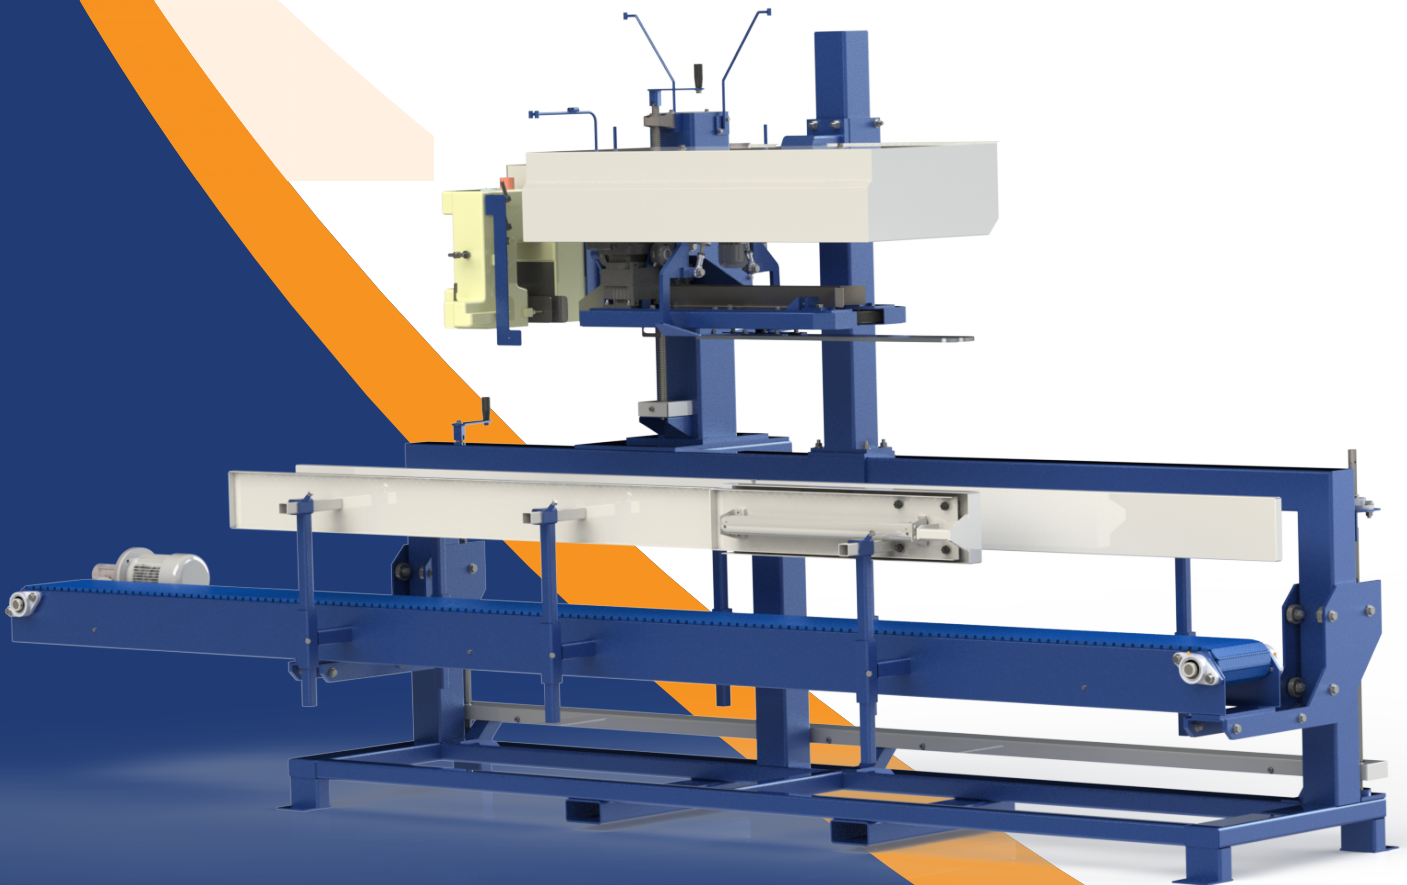

STC8900
SACK TOP CONTROL



SACK TOP CONTROL

The Sack Filling STC8900 incorporates a pneumatic bag clamp to hold the bag during the filling process. Once the bag is filled it is lowered onto the conveyor where guide plates ensure that the top of the bag is held, formed and fully supported during the cycle from the bag clamp through the automatic infeed device. It is then delivered to the stitcher or heat sealer **BEFORE** being released.

- Ensures rapid, stable, upright transfer from the filling station to the sewing head or heat sealer for uniform, parallel, precision sealing every time.
- Full pneumatic operation with PLC control for reliability.
- Either L-R or R-L system directions available.
- Can accommodate Newlong and Fischbein, sewing heads or a heatsealer. All on either fixed height or adjustable mountings.
- Adjustable board formers for different bag specifications.
- Operates with Intralox flat track conveyor. Typical throughput of up to 600 bags per hour.
- Designed for use with a MASP or MASP Lite sack placer, alternatively sacks can be manually placed.

After Sales Service

Fast on site service by factory trained engineers coupled with extensive stocks of competitively priced spare parts guarantees maximum productivity and protects the customer's investment.

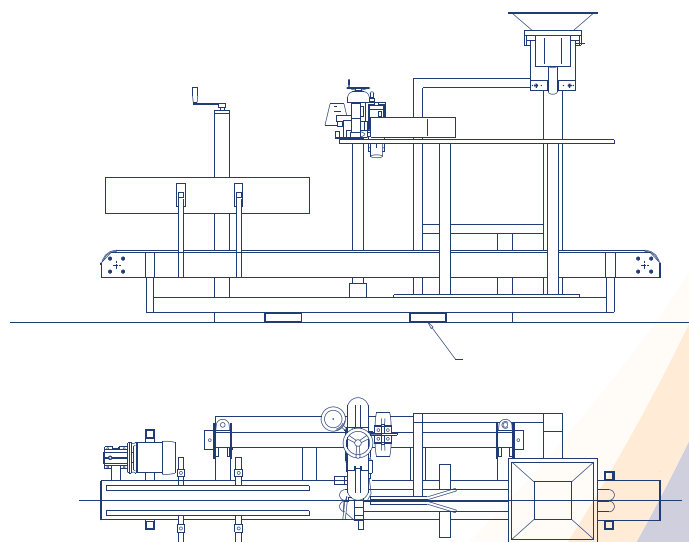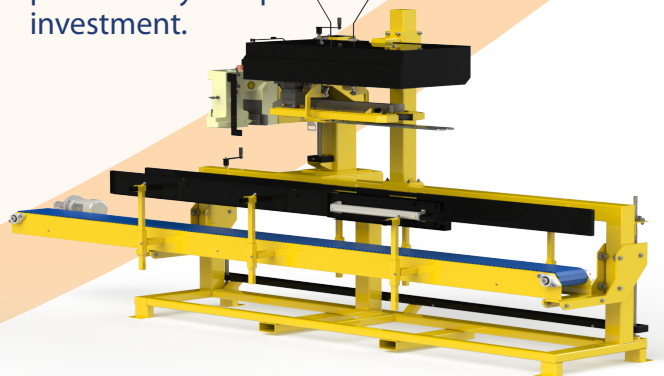

TECHNICAL SPECIFICATIONS

Throughput

Typically around 600 bags per hour.

Air Requirements


A cool dry air supply, 5.5bar (5cfm/142 ltr/min @ 80psi)

Electrical Requirement

3 Phase 415/380 or 240/220v

1 Phase 240/220v

50hz supply

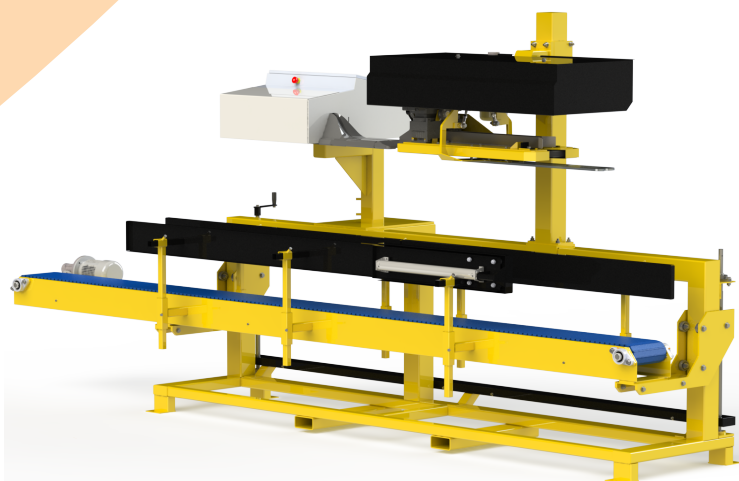

The Sack Filling & Robot Palletising Company Ltd.
Walthambury House, Cressing Farm
Witham Road, Cressing
Essex
CM77 8PD

Tel: +44 (0)1376 552020
E-Mail: sales@sfrpc.co.uk
www.thesackfillingandrobotpalletisingcompany.co.uk



**THE SACK FILLING &
ROBOT PALLETISING
COMPANY**
LIMITED